THE BOAT LOOP®

Safety and How to Use

All models · 2-4, 3-6 and 4-8 ft

Fiberglass (yellow, white) and Carbon Graphite (CG) · Standard, XL and Loop Pack

⚠ WARNING

Read this first. Misuse can cause serious injury or death.

1 **Not a permanent mooring line.**
Never leave the boat moored with it. Wind, wakes and current can break the pole.

2 **Never put the Loop around anyone's neck.**
It can choke a person.

3 **The Loop can slip off the cleat.**
You could fall backward. Brace your feet and pull smoothly.

4 **Never use it as a pry bar.**
The pole will break.

LOAD LIMITS

MAX

← PULL **100 lb**

→ PUSH **75 lb**

Set both locks first.


WARNING, CONTINUED

5 **Fend off with light pressure when extended.**
The farther the pole is extended, the easier it bends and cracks.


6 **Keep clear of overhead power lines.**
Contact can cause electric shock or death.

NOTICE It floats only when the Extension Pole is extended **12 in or more**.

PARTS Know your Boat Loop®

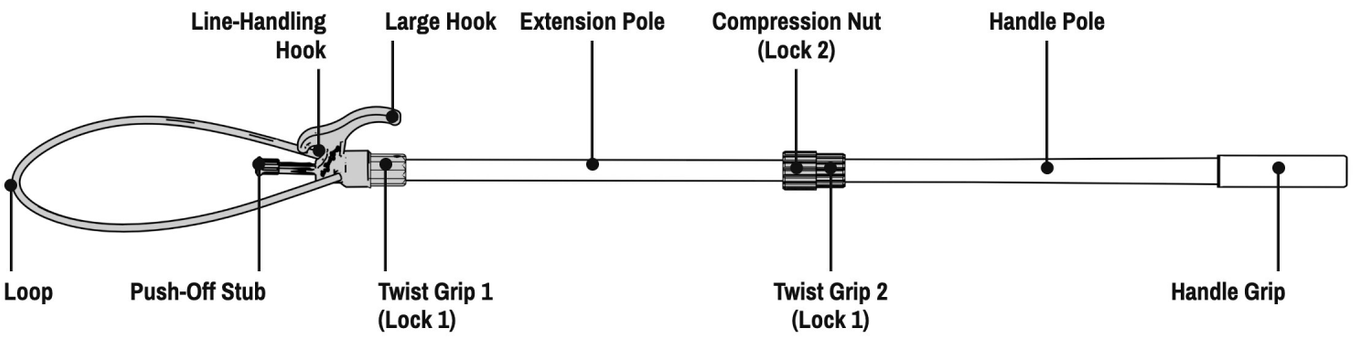


THE HEAD

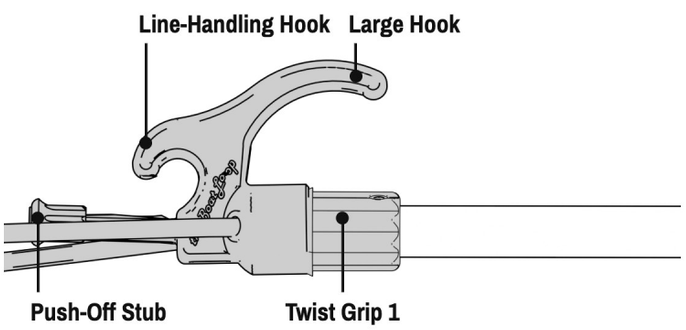

WHAT IT DOES

Dock	Drop the Loop over a cleat, piling or bollard.
Reach	Catch lines, fenders and gear.
Fend off	Push off with the Push-Off Stub.
Pass lines	Hand a line ashore or hang one on the Line-Handling Hook.
Retrieve	Recover gear that went over the side.
Swap loops	Loop Packs: swap the Standard and XL heads by hand. No tools.

LOCK 1 Twist lock — Two locks. Use both.

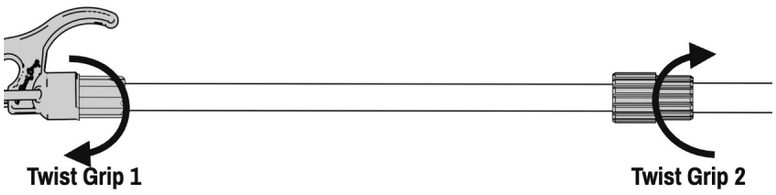

1. Extend the pole to the length you need.
2. Hold Twist Grip 1 in one hand and Twist Grip 2 in the other.
3. Twist firmly in opposite directions until you hear and feel a click.
4. To unlock, twist the grips back.

No click? It is not locked. Stop. Twist the grips back and lock again until it clicks.


THE BOAT LOOP®

Safety and How to Use


⚠ WARNING
Read before use. Unfold all the way.

RSMARINE
Assembled in Louisville, Kentucky
Latest instructions and video:
rsmarine.com/instructions


Get Boat Looped!



LOCK 2 Compression nut

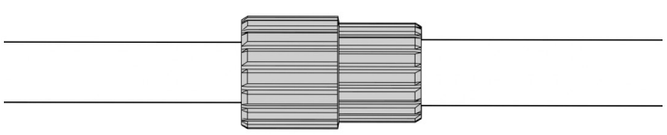

1. Turn the nut until it is snug. Hand-tight is enough.
2. It clamps the Extension Pole so it cannot slide.
3. Loosen it before you change the length.

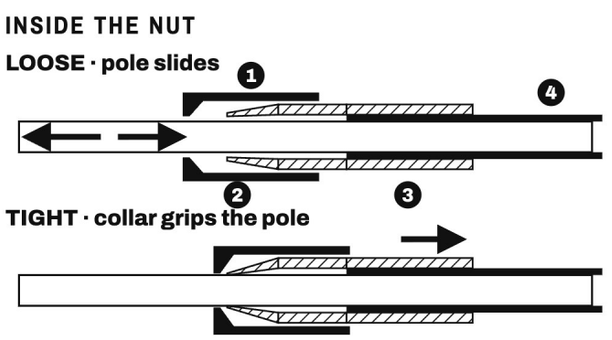

1 Nut **2** Collar
3 Threads **4** Extension Pole

HOW TO USE

1 Check the head
Make sure it is screwed on tight.

2 Set the length
Loosen the nut, then extend the pole.

3 Lock it
Twist the grips until they click, then tighten the nut. Check with a light pull.

4 Loop the cleat
Brace your feet and pull smoothly. If the Loop slips off, you can fall.

5 Make fast
Secure your dock lines by hand, then lift the Loop off.

6 Stow it
Loosen the nut first, then twist the grips back.

Docking with crew. The helm brings her alongside slowly. Crew stays aboard, loops the cleat and pulls in gently.

Care. Rinse with fresh water after salt water. Stow out of the sun. Head off: hold the Large Hook and Twist Grip 1, twist opposite ways.

BEFORE YOU PULL ☐ Head tight ☐ Lock 1 clicked ☐ Lock 2 snug ☐ Loop on the cleat ☐ Feet braced